

4-Post Lifts

Wheel Alignment

3.5-5t

WHEEL ALIGNMENT



📷 Pictured: Q-1040-AT-SL



ALPHA
GARAGE EQUIPMENT



10 Little Balmer | Buckingham Industrial Park
Buckingham | MK18 1TF | United Kingdom

📞 +44 (0)1280 812200

✉️ info@alpha-ge.co.uk

Registration number: 11079047

- ✓ Low voltage (24V) dead man's controls;
- ✓ Electrically operated locking mechanism;
- ✓ Automatic safety device in case of cable slack or sudden loss of hydraulic pressure;
- ✓ Adjustable platform to suit different vehicles;
- ✓ Recessed or surface mounted installation;
- ✓ Drive on reverse off or drive through configuration;
- ✓ Also available in single phase;
- ✓ Front recesses suitable for radius plates;
- ✓ Manual locking rear slip plates for camber adjustment (pneumatic locking plates on the Q-1050-AL-PN model);
- ✓ Built-in lifting tables on the Q-1050-AL-AUX model.

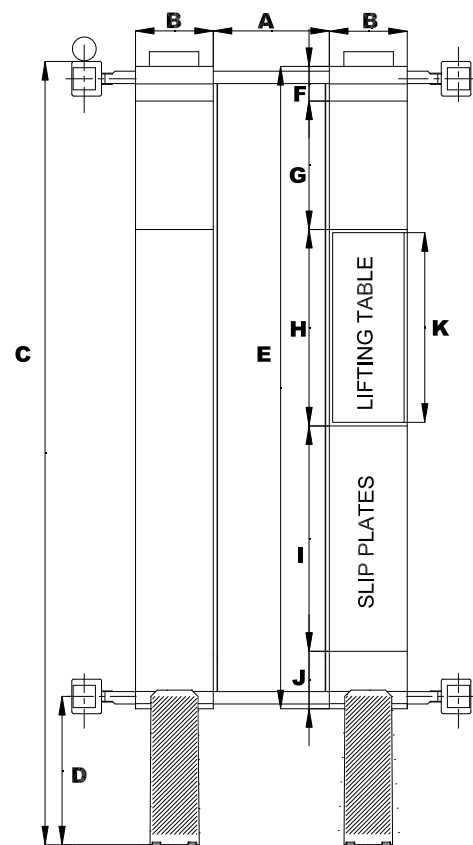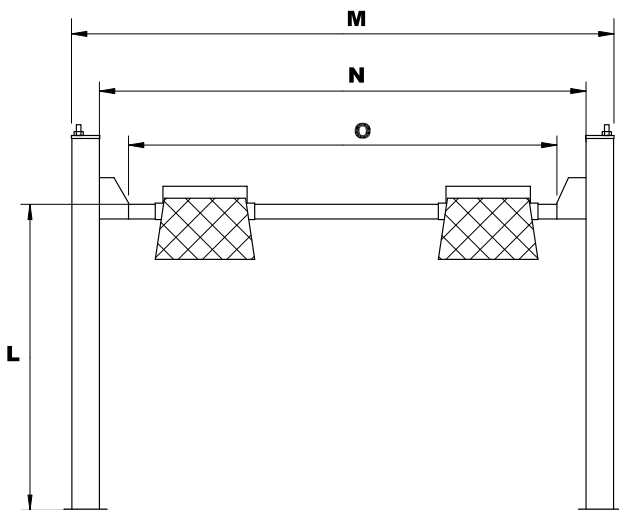

MODEL	CAPACITY	Dimensions (mm)								
		A	B	C	D	E	F	G	H	I
Q-1035-AL	3.5t	925/1205	505	5124	904	4300	550	500	1720	1060
Q-1040-AL-ST	4t	765/1045	630	5844	904	5000	400	500	2050	1650
Q-1040-AL-LP	4t	745/1025	630	6044	904	5200	145	1040	1590	1825
Q-1050-AL-PN	5t	862/1162	520	6044	904	5332	216	915	1498	2330
Q-1050-AL-LONG	5t	825/1025	630	6544	904	5700	145	1040	1590	2110
Q-1050-AL-AUX	5t	780/860	680	6250	1200	5200	334	1030	1686	1830

MODEL	K	L	M	N	O
Q-1035-AL	--/--	190/1750	3210	2850	2475
Q-1040-AL-ST	--/--	200/1750	3210	2850	2475
Q-1040-AL-LP	--/--	175/1830	3210	2970	2450
Q-1050-AL-PN	--/--	175/1970	3210	2970	2450
Q-1050-AL-LONG	--/--	155/1830	3210	2970	2450
Q-1050-AL-AUX	1500-1950	190/1830	3310	2970	2450